

How to Use this Guide

Check with your jurisdiction regarding type of submittal (paper or electronic) and for additional requirements. Draw to scale and complete the following (hint: use graph paper with $\frac{1}{4}$ " squares. Example: $\frac{1}{4}$ " = 1').


1.Complete this Building Guide by filling in the blanks on page three, and indicating which construction details will be used.

2.Provide Plot Plan(site plan) showing dimensions of your project or addition and its relationship to existing buildings or structures on the property and the distance to existing property lines drawn to scale. See page 2.


3. Fill out a building permit application.

The majority of permit applications are processed with little delay. The submitted documents will help determine if the project is in compliance with building safety codes, zoning ordinances and other applicable laws.


The Colorado Chapter of the International Code Council is a professional organization seeking to promote the public health, safety and welfare to building construction. We appreciate your feedback and suggestions. please write to the Colorado chapter of the Internationa code Council, P.O.Box 961, Arvada, CO 80001. This building guide can be found on Colorado Chapter of the International Code Council website at: http://www.coloradochaptericc.org

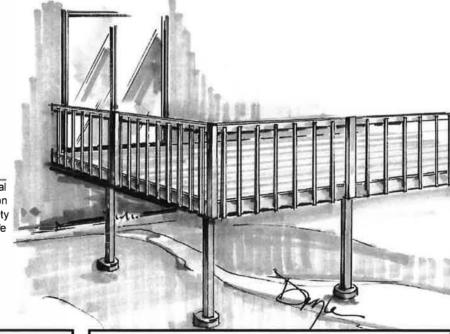

Note: A plot plan (plan view) showing the dimensions of your project or additions and its relationships to existing buildings or structures on the property must be included. In addition to project dimensions, your plot plan must also show other details such as post locations and spacing, joist and beam spans, and any other pertinent information not shown on the section drawing.

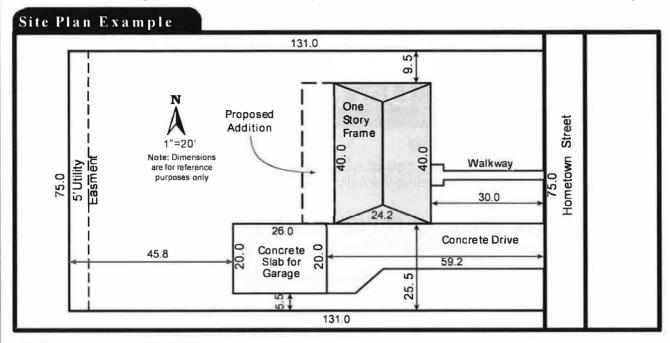

Plan View Example

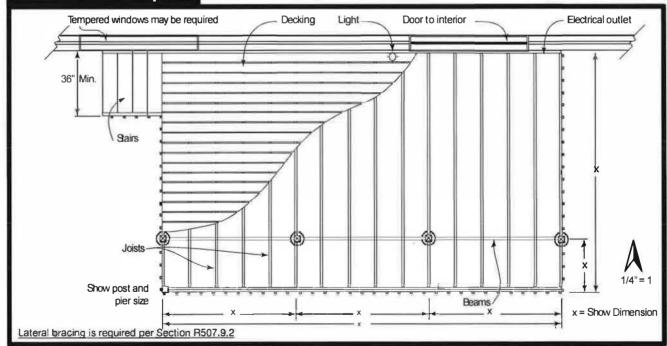

Single Family Residential Uncovered Decks and Porches **Directions** Address: **1.** Fill in the blanks. Please print legibly. **2.** Indicate in the check box which detail from page 6 will be used. Size and Spacing of Lags (example: Two runs 1/2"x 4 1/2" lags @ 16" O.C.) Type of decking **Deck Section** (example: 1 x 4 or 2 x 6 - Trex) Existing bldg. 36" high guard joists Electrical outlet with balusters " apart spaced required on decks spaced so that a (example: 2 x 10" spaced 24" apart) see Table2 4 Inch diameter inches sphere cannot pass through Approved flashing Beam splices to occur over required beam posts with 1 1/2" bearing (example: (2) 2 x 10 - see detail B) see Table3 Attach decking with non corrosive fasteners ✓ Check one in. min. (see note) □ Detail B □ Alternate Detail B1 _ posts spaced □ Alternate Detail B2 apart (example: 4 x 4 posts spaced 8' apart) **Detail A** (see page 6) Post height (see page 6) Conditions such as attachment ω Span to cantilevers or veneers may 芷 (example: 13' - 4") require Engineer's approval Span Type of exterior wall covering **Detail C** (see page 6) Finished grade below frost depth check with your Note: Emergency escape windows are allowed to be installed under decks and porches provided the location of the deck allows the emergency escape window to be fully opened and provides a path not less than 36" in height to a yard or court. 6'8" required for walk out basements or patios. This handout was developed by the Colorado Chapter of the International Code Council as a basic plan submittal under the 2018 International Residential Code. It is not intended to cover all circumstances. Check with your Department of Building Safety for additional requirements.

Table 1 Ledger connection

Ledger Connection to rim joist

Deck live load =40psf; Snowload =40psf; Dead load=10 psf


	JOIST SPAN							
CONNECTION DETAILS	6' and less	6'1" to 8'	8'1" to 10'	10'1" to 12'	12'1" to 14'	14'1" to 16'	16'1" to 18'	
	On-center spacing of fasteners							
1/2 -inch diameter lag screw with 1/2 -inch maximum sheathing	30	23	18	15	13	11	10	
1/2 -inch diameter bolt with 1/2 maximum sheathing	36	36	34	29	24	21	19	
1/2-inch diameter bolt with 1-inch maximum sheathing	36	36	29	24	21	18	16	






Ledger minimum size 2x8 presure treated HF, DF or SP #2 or better ;shall not be supported by stone or masonry veneer or be attached to a cantelivered floor





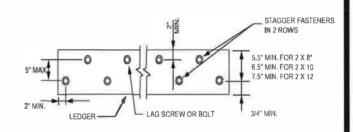

LAGSREWS AND BOLTS LOCATION IN DECK LEDGERS AND RIM JOISTS

MINIMUM END AND EDGE DISTANCES AND SPACING BETWEEN ROWS							
	TOP EDGE	BOTTOM EDGE	ENDS	ROW SPACING			
Ledger	2 inches	3/4 inch	2 inches	1-5/8 inches			
Band Joist	3/4 inch	2 inches	2 inches	1-5/8 inches			

Table 2 - Wood Joist simple span

Maximum Live Load or Ground Snow Load 40psf, Maximum Dead Load 10psf deflection L/360 Main span: L/380 cantilever

	deneedon eysoo man span, eysoo eandeser							
	JOIST SIZE	MAXI	MUM JOIST	SPAN	MAXIMUM CANTILEVER			
WOOD		SPAC	ING OF DECK .	OISTS	SPACING			
SPECIES			(inches)		OF DECK JOISTS WITH CANTILEVERS			
grade # 2 or					(inches)			
better	Simple Span	12 16 24			12	16	24	
		on center	on center	_on_center_	on center	on center	on center	
	2x6	9-11	9-0	7-7	1-3	1-4	1-6	
C Al	2x8	13-1	11-10	9-8	2-1	2-3	2-5	
Southern pine	2x10	16-2	14-0	11-5	3-4	3-6	2-10	
	2x12	18-0	16-6	13-6	4-6	4-2	3-4	
Douglas fir-	2x6	9-6	8-8	7-2	1-2	1-3	1-5	
larch, hem- fir,	2x8	12-6	11-1	9-1	1-11	2-1	2-3	
	2x10	15-8	13-7	11-1	3-1	3-5	2-9	
spruce-pine-fir	2x12	18-0	15-9	12-10	4-6	3-11	3-3	

Table 3 - Wood Beam simple span


Maximum Live Load or Ground Snow Load 40psf, Maximum Dead Load 10psf deflection L/360 Main span: L/180 captilever

Table 5 Wood B	cam shirpic span	deflection L/360 Main span; L/180 cantilever						
WOOD SPECIES	SIZE	DECK JOIST SPAN (ft-in)LESS THAN OR EQUAL TO:						
grade #2 or better	SIZE	6	8	10	12	14	16	18
Southern pine	(2)-2x8	8-9	7-7	6-9	6-2	5-9	5-4	5-0
	(2)-2x10	10-4	9-0	8-0	7-4	6-9	6-4	6-0
	(2)-2x12	12-2	10-7	9-5	8-7	8-0	7-6	7-0
Southern pine	(3)-2x8	10-10	9-8	8-6	7-9	7-2	6-8	6-4
	(3)-2x10	13-0	11-3	10-0	9-2	8-6	7-11	7-6
	(3)-2x12	15-3	13-3	11-10	10-9	10-0	9-4	8-10
Douglas fir-larch, hem-fir, spruce-pine-fir,	3 x 8 or (2)- 2 x 8	6-10	5-11	5-4	4-10	4-6	4-1	3-8
	3 x 10 or (2)- 2 x 10	8-4	7-5	6-6	5-11	5-6	5-1	4-8
	3 x 12 or (2)- 2 x 12	9-8	8-5	7-6	6-10	6-4	5-11	5-7
	4x6	6-5	5-6	4-11	4-6	4-2	3-11	3-5
	4x8	8-5	7-3	6-6	5-11	5-6	5-2	4-10
	4x10	9-11	8-7	7-8	7-0	6-6	6-1	5-8
	4 x12	11-5	9-11	8-10	8-1	7-6	7-0	6-7
	(3)-2x8	9-8	8-6	7-7	6-11	6-5	6-0	5-8
	(3)-2x10	12-0	10-5	9-4	8-6	7-10	7-4	6-11
	(3)-2x12	13-11	12-1	10-9	9-10	9-1	8-6	8- 1


Table 4 - Wood Post

Deck Wood Post Live Load 40 psf								
Deck post size	4x4	4x6	6x6	8x8				
Maximum height	6'-9"	8'	14'	14'				


Use of engineered lumber is not covered by this guide.




Detail A




Detail B




Alternate Detail B1




Alternate Detail B2



Detail C

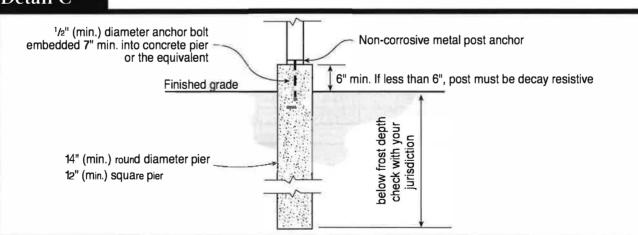


Stair & Handrail Specifications

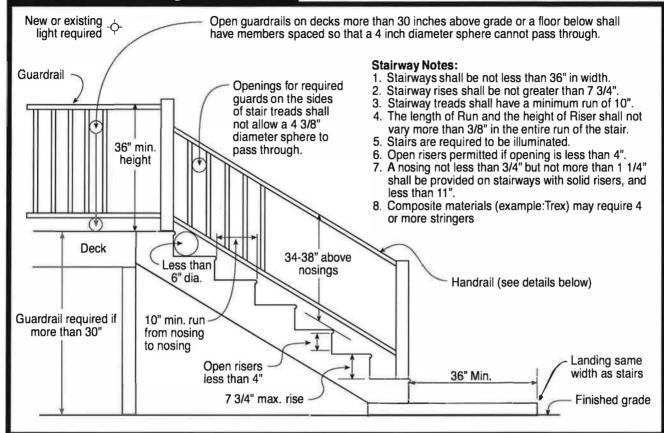


Handrail Notes:

- 1. Handrails shall be continuous on at least one side of stairs with 4 or more risers.
- 2. Top of the handrails shall be placed not less than 34 inches nor more than 38 inches above stair nosings.
- 3. The handgrip portion of handrails shall be not less than 1-1/4 inches nor more than 2 1/4 inches in cross section for non circular handrails.
- 4. Handrails shall be placed not less than 1-1/2 inches from any wall or other surface.
- 5. Handrails to be returned to wall, post or safety terminal (per 311.7.8.4 IRC)

Acceptable Handrail Details

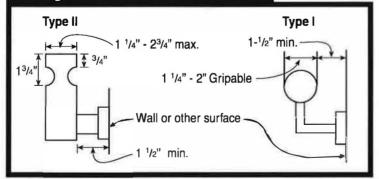



Unacceptable Handrails